

ECL 10SP Strip Panel



EK Ecoline uPVC (SL) Roofing Sheet.

100% Peace of Mind.

There's No Better Roof.

EK Ecoline Roofing System.

The Best Solar Roofs In This Era !

PRODUCT TESTED & QUALITY PROVEN

- ☼ Green Accreditation of Green Pages (Malaysia)
- ☼ SIRIM Tested BS 8414 - Part 1 : 2020
- ☼ SIRIM Tested BS 476 - Part 6 : 1989+A1 : 2009
- ☼ SIRIM Tested BS 476 - Part 7 : 1997


BENEFITS OF HOMOGENEOUS

Resistant to Cracks. The Firing Process in the Manufacture of Homogeneous Roofs gives them an Extra Level of Protection, which makes them Difficult to Crack

CEILING PANEL TYPE (Medhot Installation)

ECL 18 SWS

ECL 10 SP

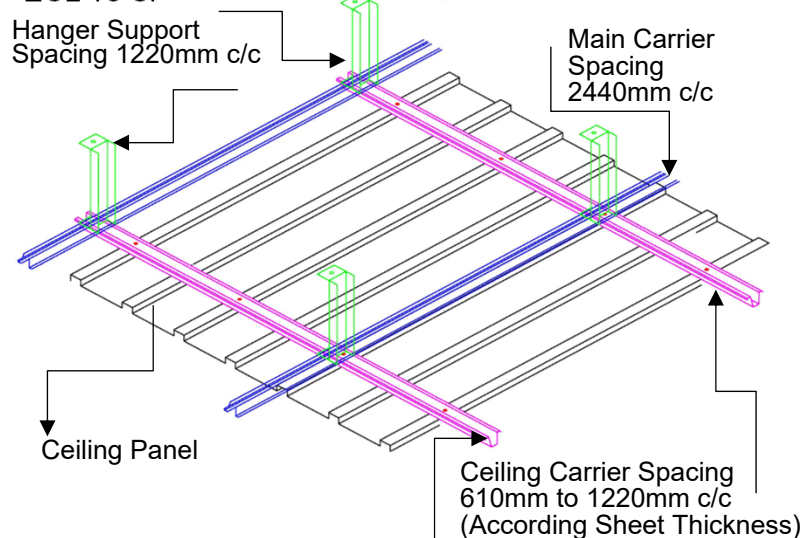


PRODUCT FEATURES

- ☼ Very Strong U.V. Protection
- ☼ Long Life Span (Durability & Longer-Lasting)
- ☼ Suitable For Solar Panels Installation
- ☼ Flame Retardant (Refer SIRIM BS 8414)
- ☼ Heat & Sound Insulation
- ☼ Environment Friendly & Energy Saving
- ☼ Impact Resistance & Low Temperature

GENERAL TECHNICAL & SPECIFICATIONS

- ☼ Roof Rib Height $\approx$ 10mm
- ☼ Thickness $\approx$ 1.15mm (2.389 kg/m²)
- ☼ Thickness $\approx$ 1.25mm (2.597 kg/m²)
- ☼ Thickness $\approx$ 1.35mm (2.805 kg/m²)
- ☼ Effective Cover Width $\approx$ 914 mm
- ☼ Overall Width $\approx$ 925 mm
- ☼ Roofs Purlin Spacing $\approx$ 610mm (Roof Underlay)
- ☼ Roofs Lapping Add Additional Length 20mm
- ☼ Wall Cladding Purlin Spacing $\approx$ 610mm ~ 762mm
- ☼ Ceiling Hanger Spacing $\approx$ 610mm~762mm (According Sheet Thickness)

ECL 10SP & ECTSL 10SP Strip Panel (7 Strip)

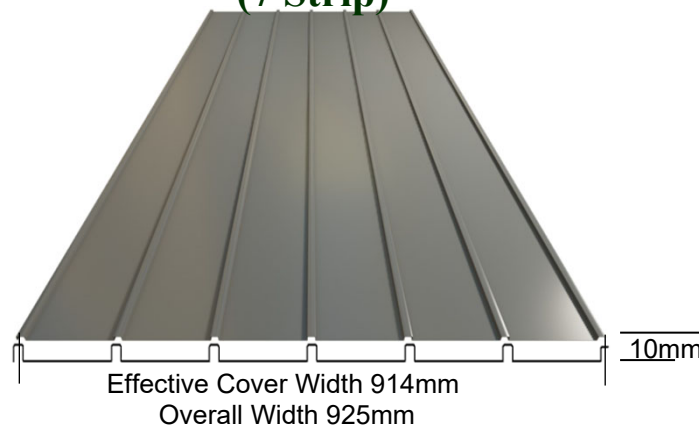

Underlay Roofing

Design-friendly and efficient

EK Ecoline ECL 10SP Ecoline Strip Panels Delivers Long-Lasting Advantages From Generation to Generations, that is not found in others alternative materials.

- ☼ **ROOF LEAKAGE PROTECTION**
- ☼ **WATER PROOFS**
- ☼ **COOLING & COMFORTABLE**

EXTRA ADVANTAGES

- ☼ Suitable For Internal & External
- ☼ Anti Corrossion & Rusty Proof
- ☼ Fire Retardant Materials
- ☼ Pest & Termite Proof
- ☼ High Solar Heat Reflection
- ☼ And Many More



- ☼ Thickness Tolerances Length $\pm$ 10mm, Width $\pm$ 3mm, Sheet Thickness 7.50%
- ☼ Manufactured from High Grade 100% Fresh Polyvinyl Chloride & Additive with Corrosion Inhibitive Treatment
- ☼ EK Ecoline Industrial Roofing Warranty up to 20 years. (Term & Conditions Apply)