

ECL 35P Premium SLC



EK Ecoline uPVC (SL) Roofing Sheet.

100% Peace of Mind.

There's No Better Roof.

EK Ecoline Roofing System.

The Best Solar Roofs In This Era !

PRODUCT TESTED & QUALITY PROVEN

- ☀ Green Accreditation of Green Pages (Malaysia)
- ☀ SIRIM Tested BS 8414 - Part 1 : 2020
- ☀ SIRIM Tested BS 476 - Part 6 : 1989+A1 : 2009
- ☀ SIRIM Tested BS 476 - Part 7 : 1997

Eco-Friendly Building Materials That Help You Save Energy & The Earth.

EK Ecoline Roofing System.

The Most Eco-Friendly Construction Materials.

PRODUCT FEATURES

- ☀ Very Strong U.V. Protection
- ☀ Long Life Span (Durability & Longer-Lasting)
- ☀ Suitable For Solar Panels Installation
- ☀ Flame Retardant (Refer SIRIM BS 8414)
- ☀ Heat & Sound Insulation
- ☀ Environment Friendly & Energy Saving
- ☀ Impact Resistance & Low Temperature

GENERAL TECHNICAL & SPECIFICATIONS


- ☀ Roof Rib Height $\approx$ 35 mm
- ☀ Minimum Slope 7°
- ☀ Thickness Range From $\approx$ 1.50mm to 2.80mm
- ☀ Effective Cover Width $\approx$ 960mm
- ☀ Overall Cover Width $\approx$ 1025mm
- ☀ Roofs Purlin Spacing $\approx$ 1000mm ~1300mm
- ☀ Roofs Lapping Add Additional Length 300mm
- ☀ Wall Cladding Purlin Spacing $\approx$ 1500mm ~1700mm

THICKNESS & WEIGHT			ROOFS				WALLS			
No	Sheet Thickness	Weight (kgs)	Single Span	End Span	Internal Span	Stiffened Overhang	Single Span	End Span	Internal Span	Stiffened Overhang
1	1.50 mm	3.197 kg	1000 mm	1000 mm	1300 mm	300 mm	1500 mm	1500 mm	1800 mm	200 mm
2	1.65 mm	3.517 kg	1100 mm	1100 mm	1400 mm	300 mm	1500 mm	1500 mm	1800 mm	200 mm
3	1.80 mm	3.836 kg	1200 mm	1200 mm	1500 mm	300 mm	1500 mm	1500 mm	1800 mm	200 mm
4	2.00 mm	4.263 kg	1200 mm	1200 mm	1500 mm	300 mm	1500 mm	1500 mm	1800 mm	200 mm
5	2.20 mm	4.689 kg	1200 mm	1200 mm	1500 mm	300 mm	1500 mm	1500 mm	1800 mm	250 mm
6	2.50 mm	5.328 kg	1300 mm	1300 mm	1500 mm	300 mm	1600 mm	1600 mm	1900 mm	250 mm
7	2.80 mm	5.968 kg	1300 mm	1300 mm	1600 mm	350 mm	1700 mm	1700 mm	2000 mm	250 mm
8	3.00 mm	6.394 kg	1300 mm	1300 mm	1600 mm	350 mm	1800 mm	1800 mm	2000 mm	250 mm

EXTRA ADVANTAGES

- ☀ Life-Cycle Cost Savings
- ☀ No Additional Painting Requirement
- ☀ Homogeneous Product
- ☀ High Solar Heat Reflection
- ☀ Low Maintenance / Self Clean
- ☀ Weather Resistance Design For Tropical Climate
- ☀ High Electrical & Thermal Insulation
- ☀ 100% Anti Rusty & Strong Corrosion Resistance
- ☀ Durability & Longer Lasting Products
- ☀ Superior Acoustic Properties
- ☀ High Impact Resistance
- ☀ Light Weight & Unbreakable.
- ☀ Noise Due to Rain - Soft & Quiet.
- ☀ Material : Virgin Fresh Vinyl Chloride Resins
- ☀ Quick & Easy Installation
- ☀ Light Transmission Option
- ☀ Applicable For Internal & External
- ☀ Improved Facility Appearance

ECL 35P & ECTSL 35P Premium Selection (6 Wave)

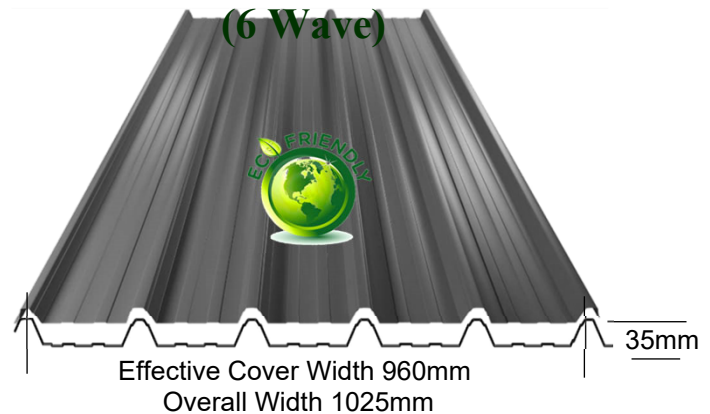

PACKING (Local Delivery & Export)

Local Delivery are Packed in Strapped Bundles x $\pm$ 1 Tonne
 Export 40ft Containers - Roof Length 11800mm x $\pm$ 26 Tonne
 Export 20ft Containers - Roof Length 5800mm x $\pm$ 20 Tonne



- ☀ Thickness Tolerances Length $\pm$ 10mm, Width $\pm$ 3mm, Sheet Thickness 7.50%
- ☀ Manufactured from High Grade 100% Fresh Polyvinyl Chloride & Additive with Corrosion Inhibitive Treatment
- ☀ EK Ecoline Industrial Roofing Warranty up to 20 years. (Term & Conditions Apply)