

ECL 38P MegaWide



EK Ecoline uPVC (SL) Roofing Sheet.

100% Peace of Mind.

There's No Better Roof.

EK Ecoline Roofing System.

The Best Solar Roofs In This Era !

PRODUCT TESTED & QUALITY PROVEN

- ☀ Green Accreditation of Green Pages (Malaysia)
- ☀ SIRIM Tested BS 8414 - Part 1 : 2020
- ☀ SIRIM Tested BS 476 - Part 6 : 1989+A1 : 2009
- ☀ SIRIM Tested BS 476 - Part 7 : 1997

Eco-Friendly Building Materials That Help You Save Energy & The Earth.

EK Ecoline Roofing System.

The Most Eco-Friendly Construction Materials.

PRODUCT FEATURES

- ☀ Very Strong U.V. Protection
- ☀ Long Life Span (Durability & Longer-Lasting)
- ☀ Suitable For Solar Panels Installation
- ☀ Flame Retardant (Refer SIRIM BS 8414)
- ☀ Heat & Sound Insulation
- ☀ Environment Friendly & Energy Saving
- ☀ Impact Resistance & Low Temperature

GENERAL TECHNICAL & SPECIFICATIONS


- ☀ Roof Rib Height ≈ 38 mm
- ☀ Minimum Slope 5° - 7°
- ☀ Thickness Range From ≈ 1.50mm to 3.00mm
- ☀ Effective Cover Width ≈ 914mm
- ☀ Overall Cover Width ≈ 960mm
- ☀ Roofs Purlin Spacing ≈ 1200mm ~1600mm
- ☀ Roofs Lapping Add Additional Length 300mm
- ☀ Wall Cladding Purlin Spacing ≈ 1500mm ~2000mm

THICKNESS & WEIGHT			ROOFS				WALLS			
No	Sheet Thickness	Weight (kgs)	Single Span	End Span	Internal Span	Stiffened Overhang	Single Span	End Span	Internal Span	Stiffened Overhang
1	1.50 mm	3.374 kg	1200 mm	1200 mm	1200 mm	300 mm	1500 mm	1500 mm	1600 mm	200 mm
2	1.65 mm	3.721 kg	1200 mm	1200 mm	1200 mm	300 mm	1500 mm	1500 mm	1600 mm	200 mm
3	1.80 mm	4.049 kg	1200 mm	1200 mm	1200 mm	300 mm	1500 mm	1500 mm	1600 mm	200 mm
4	2.00 mm	4.499 kg	1200 mm	1200 mm	1200 mm	300 mm	1500 mm	1500 mm	1600 mm	200 mm
5	2.20 mm	4.949 kg	1200 mm	1200 mm	1200 mm	300 mm	1600 mm	1600 mm	1700 mm	250 mm
6	2.50 mm	5.624 kg	1300 mm	1300 mm	1600 mm	350 mm	1600 mm	1600 mm	1800 mm	250 mm
7	2.80 mm	6.299 kg	1300 mm	1300 mm	1600 mm	350 mm	1700 mm	1700 mm	1900 mm	300 mm
8	3.00 mm	6.749 kg	1300 mm	1300 mm	1600 mm	400 mm	1700 mm	1700 mm	2000 mm	300 mm

EXTRA ADVANTAGES

- ☀ Life-Cycle Cost Savings
- ☀ No Additional Painting Requirement
- ☀ Homogeneous Product
- ☀ High Solar Heat Reflection
- ☀ Low Maintenance / Self Clean
- ☀ Weather Resistance Design For Tropical Climate
- ☀ High Electrical & Thermal Insulation
- ☀ 100% Anti Rusty & Strong Corrosion Resistance
- ☀ Durability & Longer Lasting Products
- ☀ Superior Acoustic Properties
- ☀ High Impact Resistance
- ☀ Light Weight & Unbreakable.
- ☀ Noise Due to Rain - Soft & Quiet.
- ☀ Material : Virgin Fresh Vinyl Chloride Resins
- ☀ Quick & Easy Installation
- ☀ Light Transmission Option
- ☀ Applicable For Internal & External
- ☀ Improved Facility Appearance

ECL 38P & ECTSL 38P MegaWide (6 Wave)

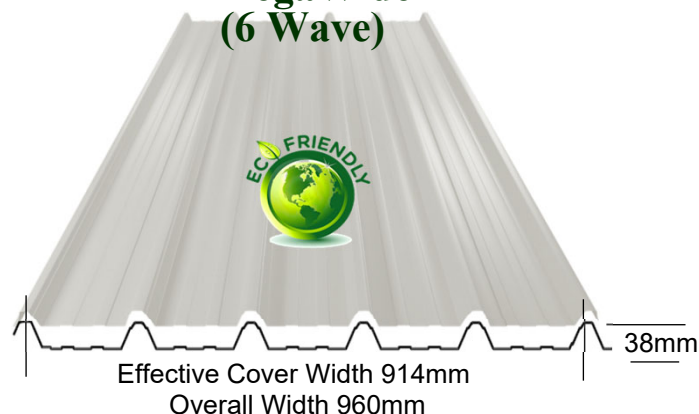

PACKING (Local Delivery & Export)

Local Delivery are Packed in Strapped Bundles x ±1 Tonne
Export 40ft Containers - Roof Length 11800mm x ± 26 Tonne
Export 20ft Containers - Roof Length 5800mm x ± 20 Tonne

BENEFITS OF HOMOGENEOUS

Resistant to Cracks. The Firing Process in the Manufacture of Homogeneous Roofs gives them an Extra Level of Protection, which makes them Difficult to Crack

TWIN SCREW EXTRUSION PROCESS

Custom Twin Screw Extrusion Production Process.
Formed to a Maximum Transportable Length
(Cut to Size) Minimise Wastage of Materials

**Latest Walling Colours Concept
The Homogeneous Materials
(Internal & External Same Colour)**

- ☀ Thickness Tolerances Length ± 10mm, Width ± 3mm, Sheet Thickness 7.50%
- ☀ Manufactured from High Grade 100% Fresh Polyvinyl Chloride & Additive with Corrosion Inhibitive Treatment
- ☀ EK Ecoline Industrial Roofing Warranty up to 20 years. (Term & Conditions Apply)