


EK Ecoline Roofing Accessories




EK Ecoline Chemical Resistant Industrial Integrated Roofing Accessories System

- ☼ Standard Length : 3000mm
- ☼ Girth Variations : 305mm, 610mm, 914mm 1220mm
- ☼ Standard Sheet Thickness : 1.50mm


Side End Trim




Masonry Trim




Fascia Capping




Superior Ridge Capping
Roofing Profile Type

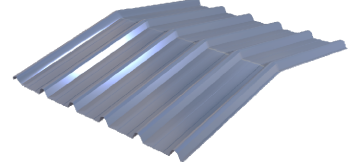


Edge Capping




Wall Flashing




Eave Trim




Smooth Curve 180°
Round




Wall Flashing (Type A)



Wall Flashing (Type B)




Corner Capping



Smooth Curve 90°
Half Round



EK Ecoline Industrial Roofing Screw The Chemical Resistant Roofing Screw "Is Your Right Choice"

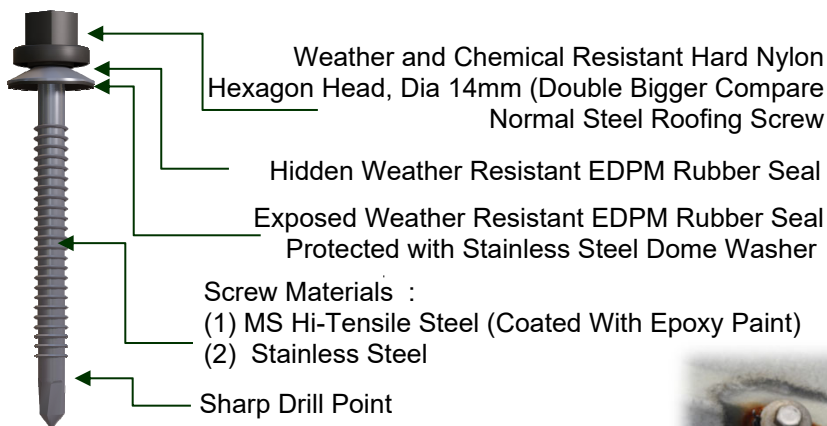

GENERAL TECHNICAL & SPECIFICATIONS

STAINLESS STEEL

Stainless Steel Hexagonal Nylon Head Fastener
Material Grade: Alloy 410 (UNS S41000)
Ultimate Tensile Strength: 510Mpa (74,000 psi)
Yield Strength (0.2% Offset): 290Mpa (42,000 psi)
Elongation at Break: 34%
Hardness (max.): 96 Rb



EK ® Corrosion Warranty The EK Ecoline ® Corrosion Warranty Gives You Peace of Mind against screw damage, roof failure and expensive call backs




Mild Steel Hexagon Head was very fast corrode and rusty will damage the roofs

The Best Roofing Fasteners Solutions
only from EK Ecoline.
Quality Proven Since from 2005



Hard Nylon
Hexagon Head

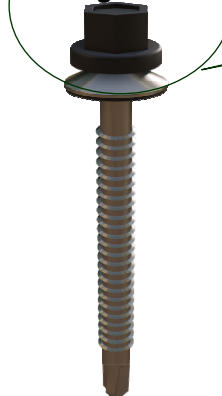

MILD STEEL

Mild Steel Hexagonal Nylon Head Fastener
Material Grade: AISI 1022 Steel
Ultimate Tensile Strength: 380Mpa (55,100 psi)
Yield Strength (0.2% Offset): 205Mpa (29,700 psi)
Elongation at Break: 25%
Hardness (max.): 111 Rb